


- Store all hardware to prevent degradation, mitigating the effort needed to tighten the bolt.
- Apply lubrication to the bolt threads and nut face to diminish friction and improve the installation.
- Use a tool with enough power, such that you regulate completion.
- Correct hole size is important for proper assembly.

Advice




See how torque is not tension

STEP 1 Assemble

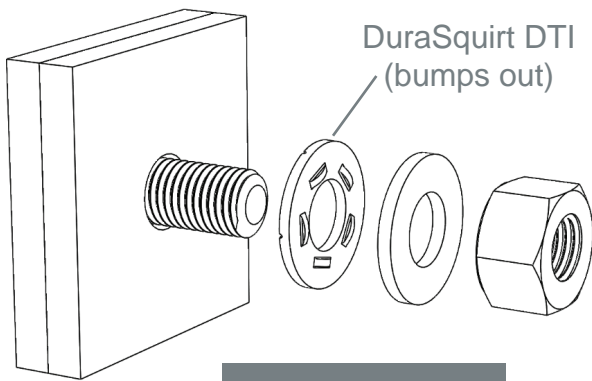


Recommended

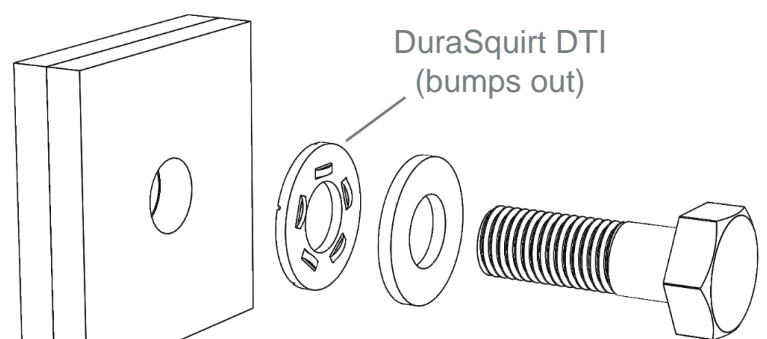

Alternative

STEP 2 Complete Indication

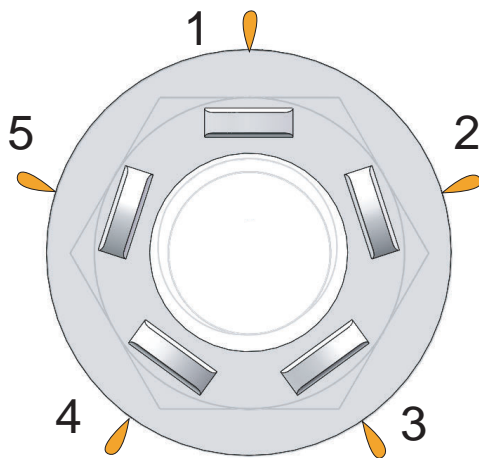

Tighten and ensure each DuraSquirt DTI squirts at all bump locations. DuraSquirt DTIs visually indicate conformity.

Our team can assist.

Call

1-802-460-3100

or email

info@appliedbolting.com