




the best way to bolt!

Bolting Completed in Three Easy Steps

1. Snug — Plies of steel in firm contact.
2. Squirt — Drive it till it squirts! No torque calibration or match-marking required.
3. Inspect — Visual indication of bolt tension; easy, safe and fast.

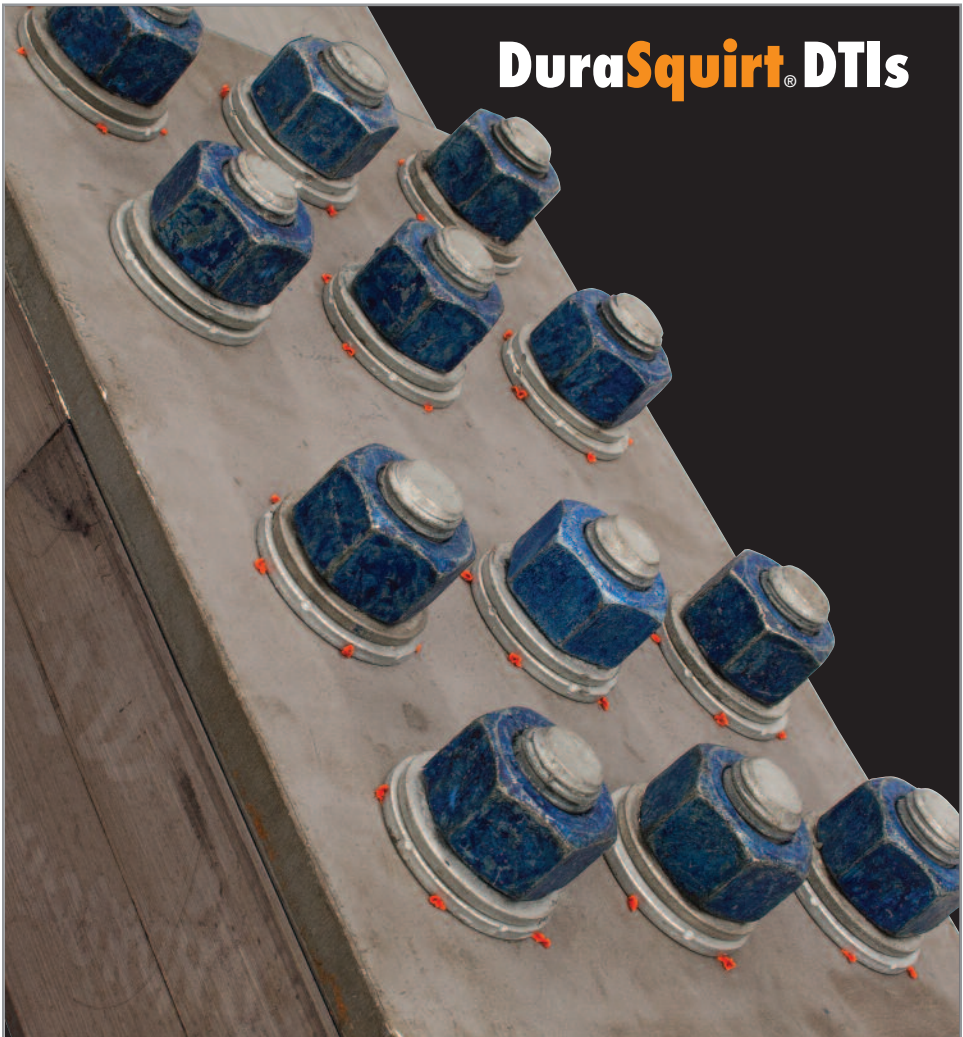

ASTM F959 **DuraSquirt® DTI** Line Card

343MGDSQ = 3/4 A325 Galvanized DuraSquirt DTI

34	3	MG	DSQ
-----	-----	-----	-----
BOLT DIAMETER	GRADE	COATING*	INDICATOR
34 = 3/4"	3 - A325	MG - Galvanized	DSQ - DuraSquirt
10 = 1.0"	4 - A490	PL - Plain	
M20 = M20	8 - 8.8	WS - Weathering Steel	
	10 - 10.9	TDZ - Thermally Diffused Zinc Alloy	

Bolt Diameter

A325			A490		
Bolt Diameter		Pcs/Keg Wt	Bolt Diameter		Pcs/Keg Wt
1/2"	123XXDSQ	1750/50 lb	1/2"	124XXDSQ	1750/50 lb
5/8"	583XXDSQ	1250/60 lb	5/8"	584XXDSQ	1250/60 lb
3/4"	343XXDSQ	1350/60 lb	3/4"	344XXDSQ	1000/60 lb
7/8"	783XXDSQ	650/60 lb	7/8"	784XXDSQ	500/60 lb
1"	103XXDSQ	500/60 lb	1"	104XXDSQ	600/60 lb
1 1/8"	1183XXDSQ	450/60 lb	1 1/8"	1184XXDSQ	350/60 lb
1 1/4"	1143XXDSQ	350/60 lb	1 1/4"	1144XXDSQ	250/60 lb
1 3/8"	1383XXDSQ	250/60 lb	1 3/8"	1384XXDSQ	200/60 lb
1 1/2"	1123XXDSQ	225/60 lb	1 1/2"	1124XXDSQ	175/60 lb

Bolt Diameter

8.8			10.9		
Bolt Diameter		Pcs/Keg Wt	Bolt Diameter		Pcs/Keg Wt
M12	M128XXDSQ	1750/60 lb	M12	M1210XXDSQ	1750/60 lb
M16	M168XXDSQ	1250/60 lb	M16	M1610XXDSQ	1250/60 lb
M20	M208XXDSQ	1000/60 lb	M20	M2010XXDSQ	1000/60 lb
M22	M228XXDSQ	650/60 lb	M22	M2210XXDSQ	500/60 lb
M24	M248XXDSQ	600/60 lb	M24	M2410XXDSQ	600/60 lb
M27	M278XXDSQ	325/60 lb	M27	M2710XXDSQ	325/60 lb
M30	M308XXDSQ	250/60 lb	M30	M3010XXDSQ	250/60 lb
M36	M368XXDSQ	175/60 lb	M36	M3610XXDSQ	175/60 lb
			M42	M4210XXDSQ	175/60 lb

*Other coatings available on request.



info@appliedbolting.com

the best way to bolt!

appliedbolting.com

toll free North America

1 800 552 1999

1413 Rockingham Road, Bellows Falls, VT 05101 USA

1 802 460 3100